



# **WatchGuard Firebox<sup>®</sup> M5600 Hardware Guide**

---

## Copyright and Patent Information

Copyright© 1998–2016 WatchGuard Technologies, Inc. All rights reserved.

WatchGuard, the WatchGuard logo, LiveSecurity, and any other mark listed as a trademark in the “Terms of Use” portion of the WatchGuard Web site that is used herein are either registered trademarks or trademarks of WatchGuard Technologies, Inc. and/or its subsidiaries in the United States and/or other countries. All other trademarks are the property of their respective owners.

Printed in the United States of America.

Part Number: 605-M563-001 Rev B

Revised: September 19, 2018

U.S. Patent Nos. 6,493,752; 6,597,661; D473,879. Other Patents Pending.

Complete copyright, trademark, patent, and licensing information can be found in the WatchGuard product documentation. You can find this document online at:

<http://www.watchguard.com/help/documentation/>

## Notice to Users

Information in this guide is subject to change without notice. Updates to this guide are posted at:

<http://www.watchguard.com/help/documentation/hardware.asp>

Companies, names, and data used in examples herein are fictitious unless otherwise noted. No part of this guide may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, without the express written permission of WatchGuard Technologies, Inc.

---

## ABOUT WATCHGUARD

WatchGuard® Technologies, Inc. is a global leader in network security, providing best-in-class Unified Threat Management, Next Generation Firewall, secure Wi-Fi, and network intelligence products and services to more than 75,000 customers worldwide. The company's mission is to make enterprise-grade security accessible to companies of all types and sizes through simplicity, making WatchGuard an ideal solution for Distributed Enterprises and SMBs. WatchGuard is headquartered in Seattle, Washington, with offices throughout North America, Europe, Asia Pacific, and Latin America. To learn more, visit [WatchGuard.com](http://WatchGuard.com).

For additional information, promotions and updates, follow WatchGuard on Twitter, @WatchGuard on Facebook, or on the LinkedIn Company page. Also, visit our InfoSec blog, [Secplicity](http://Secplicity.org), for real-time information about the latest threats and how to cope with them at [www.secplicity.org](http://www.secplicity.org).

## ADDRESS

505 Fifth Avenue South  
Suite 500  
Seattle, WA 98104

## SUPPORT

[www.watchguard.com/support](http://www.watchguard.com/support)  
U.S. and Canada +877.232.3531  
All Other Countries +1.206.521.3575

## SALES

U.S. and Canada +1.800.734.9905  
All Other Countries +1.206.613.0895

<b>Chapter 1</b>	<b>Hardware Specifications .....</b>	<b>1</b>
	Fireware OS .....	1
	Package Contents .....	2
	About Your Hardware.....	2
	Environmental Requirements.....	3
	Hardware Description.....	4
	Restore Factory-Default Settings.....	10
	Safety Notices .....	11
	Hinweise Zur Sicherheit .....	12
	Avis de sécurité .....	13
	Aviso De Seguridad .....	14
<b>Chapter 2</b>	<b>Hardware Installation .....</b>	<b>15</b>
	Rack Mount Installation .....	16
	Interface Module Installation.....	21
	Power Supply Installation .....	22
<b>Chapter 3</b>	<b>Legal and Regulatory Information .....</b>	<b>23</b>
	Limited Hardware Warranty .....	23
	Declaration of Conformity .....	25
	CE Notice .....	26
	FCC Certification .....	26
	Industry Canada.....	26
	Japan VCCI Notice (Class A ITE) .....	27
	Taiwan Class A Notice.....	27
	Mexico Notice.....	27
	Korea Notice.....	27
	RoHS Statement.....	28
	WEEE Statement .....	28
	REACH Certificate of Compliance.....	28
	Licensing .....	29



# Hardware Specifications

---

WatchGuard security appliances deliver unparalleled unified threat management, superior performance, ease of use, and value. Powerful subscription-based security services boost protection in critical attack areas for multiple layers of defense.

This guide introduces the Firebox M5600, an RoHS-compliant (lead-free) hardware product offered by WatchGuard.

## Fireware OS

---

The Firebox M5600 uses WatchGuard's next generation UTM OS — Fireware® OS. The Firebox includes Fireware and delivers exceptional protection against today's sophisticated threats to make sure that your business stays connected. For more information on the features of Fireware OS, see the current *Fireware Help*.

## Package Contents

---

- Firebox M5600 device
- *Quick Start Guide*
- 1 straight-through Ethernet cable (green)
- 1 cross-over Ethernet cable (red)
- 1 serial cable with an RJ-45 connector (console cable)
- 6 power cords (2 each for US, EU, and UK)
- 2 rack mount ear brackets, with 4 screws each
- Rack mount rail kit

## About Your Hardware

---

### Hardware Specifications

<b>Processor</b>	Intel Xeon E5-2680V2
<b>Storage:</b>	2GB CFAST CARD + 250 GB 2.5" SATA HDD
<b>Memory: DDR3</b>	16 GB
<b>Power supply</b>	Dual power supplies 400W 100-240VAC/6-3A/47-63Hz
<b>Dimensions</b>	Depth: 22.83" (58 cm) Width: 17.25" (43.8 cm) Height: 1.73" (4.4 cm) - 1U
<b>Weight</b>	26.45 lbs (12 Kg)

### Interface Specifications

<b>Network interfaces</b>	9x 1000 Base-TX (10/100/1000 Mbps), RJ45 connector 4x 10 G SFP+ ports
<b>I/O interfaces</b>	2 USB 2.0 1 RJ45 RS232 console port

This specification describes the interfaces that are on the Firebox M5600 as shipped. The Firebox also has two empty bays where you can install additional optional interface modules. The supported interface modules are described in the Hardware Description section.

---

## Environmental Requirements

---

To safely install your Firebox, we recommend that you:

- Install it in a network rack  
For installation instructions, see “Rack Mount Installation” on page 16.
- Put it in a secure area, such as a locked room, to block the device from people who do not have permission to use it
- Connect it to a conditioned power supply to prevent damage from sudden power changes

Other M5600 environmental requirements:

<b>Operating temperature</b>	0 - 40°C (32 - 104°F)
<b>Operating humidity</b>	5% - 90% non-condensing
<b>Non-operating temperature</b>	-10 - 70°C (14 - 158°F)
<b>Non-operating humidity</b>	5%-90%, non-condensing

## Hardware Description

---

### Front View

Firebox M5600 front view:



Left front:



### Buttons and Indicators

#### Power (⏻)

The power indicator on the left front of the device is green when the device is powered on.

#### Arm/Disarm (🛡️)

When the device is armed and ready to pass traffic, this indicator is green. When the device is powered on, but not ready to pass traffic, this indicator is red.

#### Storage (💾)

When there is activity on the CFAST card or hard disk this indicator is yellow.

#### Power Button (⏻)

The Power button, on the left side of the Firebox, is lit to indicate power status. It is green when the Firebox is powered on, and red when power is available, but the Firebox is powered off.

When the Power button is red, press this button to power on the device.

When the Power button is green, press and hold the power button for five seconds to power off the device. The Firebox does not power off if you briefly press the power button.

#### Reset Button

The Reset button, located to the right of the power button, resets the device to factory-default settings. To reset the device, use the procedure in "Restore Factory-Default Settings" on page 10.



## Built-In Interfaces

The Firebox M5600 has one built-in network interface, two USB interfaces, and one serial console port. It also includes two pre-installed interface modules, as described in the subsequent section.

### Dual USB interfaces

Connect a USB storage device to use for USB backup and restore, or to store a support snapshot.


For more information about USB functions, see the current *Fireware Help*.

### Console port

An RJ45 connector for the serial (console) interface is the bottom interface located to the left of the USB interfaces. You can connect to this serial interface to log in to the Fireware command line interface.

For more information about the command line interface, see the current *Fireware Command Line Interface Reference*.

### RJ45 Ethernet interfaces

Interface 32, labeled , is located above the console port, to the left of the USB interfaces. You must connect to this interface to configure the Firebox when it is in factory-default configuration.

Interface 32, and modular interfaces A0 - A7 are RJ45 Ethernet interfaces that support link speeds of 10, 100, or 1000 Mbps. Each RJ45 interface has two indicators. The right indicator shows the interface connection status. The left indicator shows interface activity.

Indicator	Indicator color	Interface Status
<b>Connection (right)</b>	Yellow	Link at 1000 Mbps
	Green	Link at 100 Mbps
	Not lit	Link at 10 Mbps, or no link
<b>Activity (left)</b>	Yellow, blinks	Power on, network activity
	Not lit	Power off, no connections

## Interface Modules

The Firebox M5600 has four interface module slots, A, B, C, and D. Slots A and B have modules pre-installed.

- Slot A has the 8 Port 1G RJ45 Copper Module preinstalled
- Slot B has the 4 Port 10Gbps SFP+ Fiber Module preinstalled

To add more interfaces to your Firebox, you can install interface modules in slots C and D. You must install the interface module before you can configure the interfaces. For instructions to install or remove interface modules, see "Interface Module Installation" on page 21.



Interface modules are not hot-swappable. To avoid damage to the system, power off the Firebox before you install or remove interface modules.

You can purchase compatible interface modules from an authorized WatchGuard reseller:

- WatchGuard Firebox M 8 Port 1Gb Copper Module — WatchGuard SKU WG8592
- WatchGuard Firebox M 8 port SFP Fiber Module — WatchGuard SKU WG8593
- WatchGuard Firebox M 4 Port 10 Gb SFP+ Fiber Module — WatchGuard SKU WG8594


For each interface module, ports are numbered from 0-7 or 0-3. In the Firebox configuration, each interface has a number between 0 and 32. The interface numbers that appear in the Firebox configuration depend on the slot where each interface module is installed.

Installed in Firebox slot	Number of ports	Modular interface port numbers	Interface numbers in management software
A	8	A0 - A7	0 - 7 (preinstalled)
A	4	A0 - A3	0 - 3
B	8	B0 - B7	8 - 15
B	4	B0 - B3	8 - 11 (preinstalled)
C	8	C0 - C7	16 - 23
C	4	C0 - C3	16 - 19
D	8	D0 - D7	24 - 31
D	4	D0 - D3	24 - 27

Indicators for the modular interfaces are described in the subsequent sections.

### 8 port 1G RJ45 Interface Module

The eight RJ45 interfaces are numbered from 0 to 7.

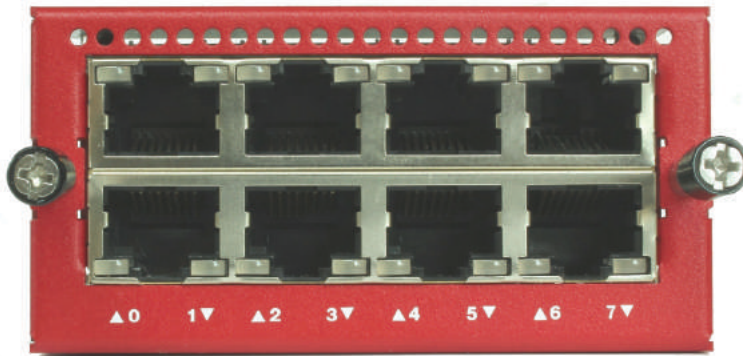


Each RJ45 interface has two indicators. The right indicator shows the interface link status. The left indicator shows interface activity.


Indicator	Indicator color	Interface Status
<b>Activity (left)</b>	Yellow, blinks	Power on, network activity
	Not lit	Power off, no connections
<b>Connection (right)</b>	Yellow	Link at 1000 Mbps
	Green	Link at 100 Mbps
	Not lit	Link at 10 Mbps, or no link

## 8 port 1G SFP Interface Module

The eight SFP interfaces are numbered from 0 to 7. To use these interfaces you must plug in a compatible SFP transceiver.

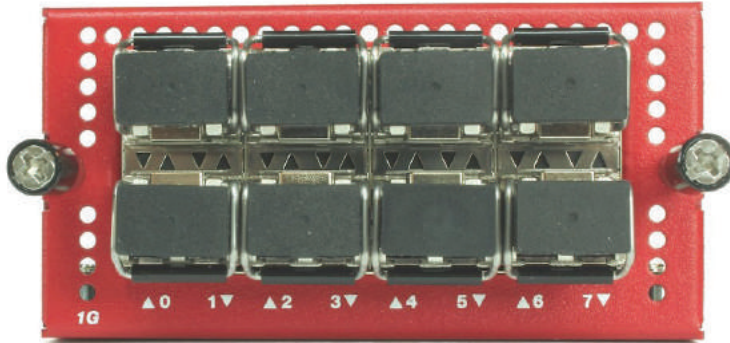

Each SFP interface has two indicators. Indicators are located in the center of the interface module, between the upper and lower row of interfaces. Indicators that point up (▲) show the status of the upper interface. Indicators that point down (▼) show the status of the lower interface.

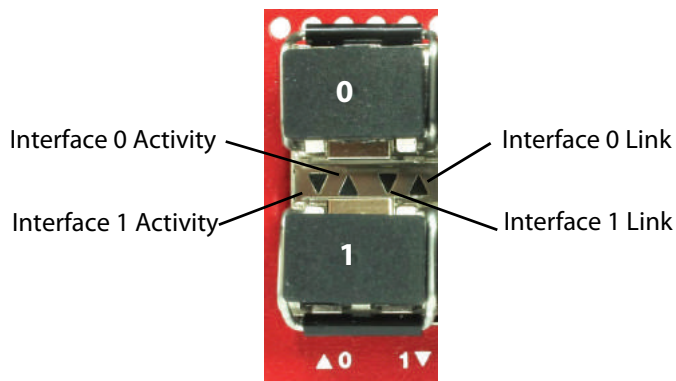

For each interface, the left indicator shows activity, and the right indicator shows the link status..

Indicator	Indicator color	Interface Status
<b>Activity (left)</b>	Orange, blinks	Power on, network activity
	Not lit	Power off, no connections
<b>Connection (right)</b>	Orange	Link at 1000 Mbps
	Not lit	No link


You can purchase compatible SFP transceivers from an authorized WatchGuard reseller.

### SFP multi-mode transceivers (1000Base-SX, 850nm)

FINISAR FTLF8519P3BNL  
WatchGuard SKU WG8585

### 4 port 10G SFP+ Interface Module

The four SFP+ ports are numbered 0 - 3. To use these interfaces, you must plug in a compatible SFP+ transceiver.

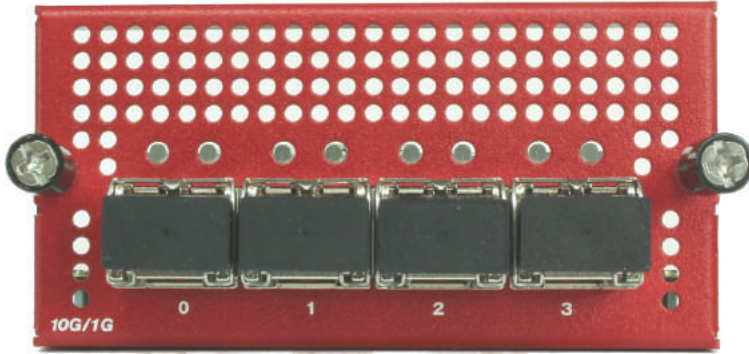

Each SFP+ port has two indicators. The left indicator shows link status, the right indicator shows activity.

Indicator	Indicator color	Interface Status
<b>Connection (left)</b>	Green	Operates at 10 Gbps or 1 Gbps
	Not lit	No link
<b>Activity (right)</b>	Orange, blinks	Power on, network activity
	Not lit	Power off, no connections

You can purchase compatible SFP transceivers from an authorized WatchGuard reseller.

**SFP+ multi-mode transceiver (10GBase-SR/1000Base-SX 850 nm)**  
FINISAR FTLX8571D3BCV  
WatchGuard SKU WG8583

## Rear View

Rear view of the Firebox.



### Cooling fans

The fans decrease the internal temperature of the device. The fans start at maximum RPM when the Firebox is powered on. The device adjusts the fan speed based on the external temperature and device CPU load.

### AC receptacles

Each AC receptacle accepts a detachable AC power cord supplied with the Firebox. Each power supply is a WatchGuard standard auto-sensing AC power supply.

### Power Switch

Controls the power supplied to the Firebox. The power switch activates both power supplies.


### Replaceable power supplies

There are two power supplies on the Firebox M5600, each with a green power indicator at the top.

If one of the power supplies fails, the power indicator for that power supply goes out, and audible alarm sounds. It is not necessary to power off the Firebox to replace a failed power supply.

### Alarm reset button

If either of the two power supplies fails for any reason, an audible alarm sounds. To silence the alarm, press the reset button, located to the left of the power supplies.

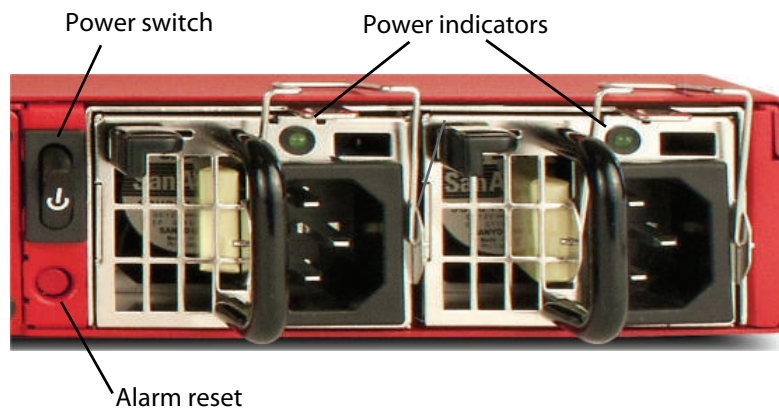

## Restore Factory-Default Settings

---

If you ever need to, you can restore your Firebox to its factory-default settings. For example, if you do not know the administrator account passphrase or you want to start over with a new configuration, you can reset your device. Make sure you back up your device configuration before you reset your device in case you want to restore it in the future.

To reset your device:

1. Power off the device.
2. Press and hold the **Reset** button, while you briefly press the **Power** button on the front of the device to power it on.
3. Continue to hold the **Reset** button while the **Arm** indicator is red.
4. Continue to hold the **Reset** button while the **Arm** indicator is slowly flashing green.
5. When the **Arm** indicator flashes green more rapidly, release the **Reset** button.
6. Wait until the **Arm** indicator starts flashing red.
7. Press and hold the **Power** button on the front of the device for five seconds to power off the device.
8. Briefly press the **Power** button on the front of the device to power it on.

## Safety Notices

---

All WatchGuard products are designed and tested to meet strict safety requirements. These requirements include product safety approvals and other global compliance standards. Read these instructions carefully before you operate the product, and refer to them as needed for continued safe operation of your product.

### Product Safety Certification

The WatchGuard product is safety certified for these standards:

- CAN/CSA C 22.2 No. 60950-1-07+A1:2011+A2:2014
- UL 60950-1:2007 R10.14
- IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
- EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

### Safety Warning

- Do not place objects on the power cords.
- Do not obstruct the ventilation openings. These openings prevent overheating of the device.
- Never push objects of any kind into slots or openings on this equipment. If you make contact with a voltage point or short out a part, it can result in fire or electrical shock.
- If the equipment is supplied with a three-conductor AC power cable, the power cable must be plugged in to an approved three-contact electrical outlet with the grounding wire connected to an electrical ground (safety ground) at the power outlet.
- When you remove or install a device, follow the general installation safety instructions provided in this Hardware Guide to avoid injury or damage to the device.
- The lithium battery used in the security appliance may not be replaced by the user. Return the appliance to a WatchGuard authorized service center for replacement with the same or equivalent type recommended by the manufacturer. If, for any reason, the battery or security appliance must be disposed of, do so following the battery manufacturer's instructions.
- You must disconnect power the AC power cord from both power supplies before you remove the cover of the Firebox for any reason.

## Hinweise Zur Sicherheit

---

Alle WatchGuard Produkte werden entwickelt und getestet, um strenge Sicherheitsanforderungen zu erfüllen. Diese Anforderungen umfassen Produktsicherheit Zulassungen und andere globale Compliance-Standards. Bitte lesen Sie die folgenden Anweisungen sorgfältig, bevor Sie das Produkt, und bezeichnen sie als notwendig, um den sicheren Betrieb des Geräts zu gewährleisten. Weitere Informationen finden Sie in der elektronischen Hardware Guide.

Die WatchGuard Produkt ist Sicherheit unter den folgenden Normen zertifiziert:

- CAN/CSA C 22.2 No. 60950-1-07+A1:2011+A2:2014
- UL 60950-1:2007 R10.14
- IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
- EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

### Sicherheitshinweis

- Legen Sie keine Gegenstände auf das Netzkabel.
- Sorgen Sie dafür, dass die Öffnungen der Ventilation zu keinem Zeitpunkt verschlossen, verstopft oder anderweitig blockiert sind. Die Ventilation verhindert ein Überhitzen des Gerätes.
- Stecken Sie niemals Gegenstände irgendwelcher Art in Schlitze oder Öffnungen des Gerätes. Wenn Sie Kontakt mit einem spannungsführenden Punkt oder ein Bauteil kurzschließen, kann es zu einem Brand oder elektrischen Schlag führen.
- Falls dieses Gerät mit einem Schutzkontaktnetzkabel ausgeliefert wird, verwenden Sie ausschließlich nur dieses an einer dafür vorgesehenen Netzsteckdose.
- Um Verletzungen oder Schäden am Gerät zu vermeiden, befolgen Sie vor dem Entfernen oder Installieren des Gerätes die im Hardware Guide zur Verfügung gestellten allgemeinen Installations- und Sicherheitshinweise.
- Die in dem Gerät verwendete Lithium-Batterie kann nicht vom Verbraucher getauscht werden. Bei Bedarf senden Sie das Gerät an einen WatchGuard Autorisierten Service-Center, um diesen Tausch mit einer vom Hersteller empfohlenen gleichen oder eines gleichwertigen Typs durchführen zu lassen. Entsorgen Sie die Batterie, bzw. das Gerät gemäß Ihren örtlichen Entsorgungsbestimmungen.



---

## Avis de sécurité

---

Tous les produits de WatchGuard sont conçus et testés pour répondre à des exigences de sécurité strictes. Ces exigences incluent l'homologation de la sécurité du produit et la conformité à d'autres normes globales. Lisez ces instructions avec attention avant de mettre en route l'appareil et reportez-vous-y au besoin pour assurer une utilisation sûre de l'appareil.

### Certifications de sécurité du produit

Les produits de WatchGuard répondent aux normes suivantes;

- CAN/CSA C 22.2 No. 60950-1-07+A1:2011+A2:2014
- UL 60950-1:2007 R10.14
- IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
- EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

### Avertissement de sécurité

- Ne placez aucun objet sur le cordon d'alimentation.
- N'obstruez pas les ouvertures de ventilation. Ces ouvertures préviennent la surchauffe de l'appareil.
- N'insérez jamais d'objet de quelque sorte dans les fentes d'ouverture de cet équipement. Si vous faites contact avec un point sous tension ou court-circuitez un composant, cela peut causer un incendie ou un choc électrique.
- Si l'appareil est fourni avec un câble d'alimentation électrique à trois points (avec prise terre), le câble d'alimentation doit impérativement être branché sur une prise à trois points correctement mise à la terre.
- Quand vous enlevez ou désinstallez un équipement, suivez les instructions générales de sécurité fournies dans ce Guide Matériel pour éviter toute blessure ou dégât à l'appareil.
- La batterie au lithium utilisée dans cet appareil de sécurité réseau ne peut pas être remplacée par l'utilisateur final. Renvoyez cet appareil à un centre de service autorisé par WatchGuard pour un remplacement avec une batterie du même type ou de type équivalent recommandé par le fabricant. Si pour une raison quelconque la batterie ou cet équipement doit être mis au rebus, suivez les recommandations du fabricant de la batterie.

## Aviso De Seguridad

---

Todos los productos WatchGuard están diseñados y probados para satisfacer estrictos requisitos de seguridad. Estos requisitos incluyen la homologación de productos de seguridad y otras normas de cumplimiento global. Por favor, lea atentamente las siguientes instrucciones antes de utilizar el producto, y se refieren a ellos como sea necesario para garantizar el funcionamiento seguro y continuo de su producto. Información adicional se puede encontrar en la Guía del usuario electrónica.

### Certificación de seguridad del producto

El producto tiene certificación de seguridad WatchGuard bajo las siguientes normas:

- CAN/CSA C 22.2 No. 60950-1-07+A1:2011+A2:2014
- UL 60950-1:2007 R10.14
- IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
- EN 60950-1:2006+A11:2009+A1:2010+A12:2011+A2:2013

### Advertencia de seguridad

- No coloque objetos sobre el cable de alimentación.
- No obstruya las aberturas de ventilación. Estas aberturas evitan el sobrecalentamiento de la máquina.
- Nunca introduzca objetos de ningún tipo en las ranuras o aberturas del equipo. El contacto con puntos de voltaje o el cortocircuito de una pieza podría provocar un incendio o una descarga eléctrica.
- Si el equipo se suministra con un cable de alimentación de CA de tres conductores , el cable de alimentación debe estar conectado a una toma de corriente de tres contactos aprobado con el cable de tierra conectado a un (a tierra de seguridad) planta eléctrica en la toma de corriente.
- Al extraer o instalar un electrodoméstico, siga las instrucciones generales de instalación de seguridad.
- La batería de litio utilizada en el dispositivo de seguridad no podrá ser sustituido por el usuario. Devuelva el aparato a un centro de servicio autorizado de WatchGuard para el reemplazo con el mismo tipo o equivalente recomendada por el fabricante. Si , por cualquier razón , la batería o la seguridad del aparato se debe desechar, hágalo siguiendo las instrucciones del fabricante de la batería.

# Hardware Installation

---

Your Firebox ships with a rack mount kit. It also supports user-installable components. Use the instructions in this chapter to safely install your Firebox and any optional components.

This chapter includes instructions for:

- Rack mount installation
- Interface module installation
- Power supply replacement

## Rack Mount Installation

---

Each Firebox M5600 ships with a rack mount system.

The rack mount system consists of:

- Rack rail kit
  - 2 sliding rails



- 10 small screws and 8 large screws



- Front ear bracket kit
  - 2 front ear brackets



- 6 small screws and 2 large screws



## Precautions

When you install the Firebox in a rack, consider these factors:

### Elevated Operating Ambient Temperature

If you install the device in a closed or multi-unit rack assembly, the operating ambient temperature of the rack environment may be greater than room ambient. Make sure the ambient temperature of the rack environment is within the certified operating range specified in this Hardware Guide.

### Reduced Air Flow

When you install the device in a rack, make sure that the amount of air flow required for safe operation of the equipment is not compromised.

### Mechanical Loading

When you mount the device in the rack, avoid hazardous conditions caused by uneven mechanical loading.

### Circuit Overloading

Make sure you connect the device to the power supply circuit in such a way that there is no overloading of the circuits, and no impact on overcurrent protection and supply wiring.

### Reliable Grounding

Make sure all rack-mounted equipment is correctly grounded. For example, make sure you use power strips instead of direct connections to the branch circuit.



### CAUTION:

Do not use your slide/rail mounted device as a shelf or work space.

## Rack Mount Installation Instructions

### Separate the inner rails from the outer rails

1. Pull out the inner rail as shown below.



2. Continue to slide the inner rail out until you hear a click.



3. Turn the rail over. Slide the white release tab on the inner rail away from the outer rail, and pull the inner rail from the outer rail until they completely separate.




4. Repeat these steps to separate the second inner and outer rail.

### Attach the inner rails and front ear brackets to the Firebox

Use these steps to attach the inner rails and front mounting brackets to the Firebox.

1. Locate the ten short screws, and the front ear brackets and screws.
2. Use three of the screws provided with the front ear brackets to attach an ear bracket to the front of the Firebox on one side.
3. Put the inner rail against one side of the Firebox with the small blue release tab toward the front of the Firebox, facing out.

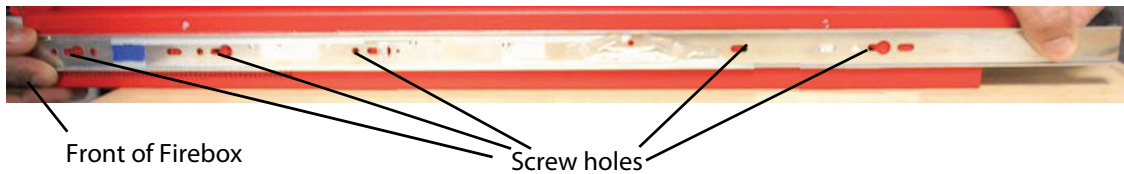


4. Align the screw holes in the rail with the five screw holes on the sides of the Firebox. The inner rail extends out from the back of the Firebox.
5. Attach the inner bracket to the chassis with five of the short screws provided in the rail kit.
6. Repeat these steps to attach the other inner rail and front ear bracket to the other side of the Firebox.

## Attach the outer rails to the rack


You do not need to use screws to attach the rails to the network rack. To attach rails to the rack, align the screw heads on each end of the rail with holes in the rack and then latch the rail to the front and back of the rack as described below.

Use these steps to install the rails in a network rack:

1. Align the front of one rail with three available screw holes in the front edge of the rack.
2. Press the end of the rail toward the rack until the metal latch in the center of the rail clicks into place around the inner edge of the rack.
3. Align the rear of the outer rail with three available screw holes in the rear of the rack.
4. Pull the latch handle slightly toward the center of the rack and snap it into place around the inner edge of the rack.
5. Repeat these steps to install the second sliding rail in the rack.

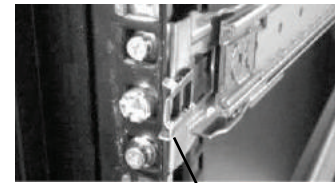

Front latch



Rear latch handle

## Install alternate screws on the rails

If the screw heads on the rail ends are too large to fit through the holes in your network rack, use the eight screws with smaller heads (included with the rail kit) to replace the screws on the rails before you install the rails in the rack.

1. Remove the outer two screws on the front of the rail and replace them with two smaller screws included with the rail kit.
2. Remove the two screws from the back of the rail and replace them with two smaller screws included with the rail kit.
3. Repeat these steps to install smaller screws on the second rail.
4. Install the rails in the rack as described in the previous procedure.



Remove and replace



Remove and replace

### Install the Firebox in the rack

Use these steps to complete installation of the Firebox in the rack. It could require two people to safely complete these steps.

1. Stand in front of the rack and hold the Firebox with its front facing you.
2. Align the inner rails on each side of the Firebox with the outer rail on each side of the rack.
3. Slide the Firebox into the rack as far as possible.
4. Slide the blue slide rail locks on the inner rails toward the front and slide the Firebox farther into the rack, until the front ear brackets touch the front of the rack.
5. You can use the larger screws included with the rack ears to attach the rack ear brackets to the rack if you do not plan to frequently pull this device out of the rack.

### Remove the Firebox from the rack

You must release the slide rail locks to remove the Firebox from the rack. It could require two people to remove the device from the rack. The slide rail locks are blue tabs on the inner rails on each side of the Firebox.

To remove the Firebox from the rack:

1. Remove any screws that attach the mounting bracket to the front of the rack.
2. Gently pull the device out about half way.
3. Slide the blue rail locks on the inner rails toward the front of the Firebox and pull the Firebox completely out of the rack.



---

## Interface Module Installation

---

You can install any supported interface module in slots A, B, C, or D of your Firebox. Two interface modules are pre-installed in slots A and B. The supported interface modules are described in detail in the Hardware Specifications chapter.



---

Interface Modules are not hot-swappable. To avoid damage to the system, you must disconnect the Firebox from all power sources before you install or remove an interface module.

---

### Install an Interface Module

To install an interface module:

1. Disconnect both power cables from the Firebox.
2. Loosen the two captive screws on the slot cover.
3. Remove the slot cover to expose the interface slot.
4. Insert the interface module into the slot, and push it firmly into place.
5. Tighten the two captive screws on the interface module to attach the interface to the Firebox.
6. Reconnect the power cables to the Firebox.

*The Firebox starts automatically. When the Firebox starts, Fireware automatically detects all installed interfaces.*

### Remove an Interface Module



---

Before you remove an installed interface module, make sure that the interfaces on that module are not enabled in the Firebox configuration. You cannot manage a Firebox if an enabled interface has been removed.

---

To remove an installed interface module:

1. Disconnect both power cables from the Firebox.
2. Disconnect all network cables from the installed interface module.
3. Loosen the two screws on the installed interface module.
4. Slide the interface module out of the slot.
5. Place the removed interface module on an antistatic surface, or immediately install it in another slot.
6. Install a slot cover over the empty slot or install another interface module.


*The slot cover keeps dust out of the Firebox and promotes necessary air flow through the interface slot.*

## Power Supply Installation

---

The Firebox M5600 has two redundant hot-swappable power supplies. If a power supply fails, you can replace it while the Firebox is powered by the other power supply.

### Firebox M5600 Power Supplies

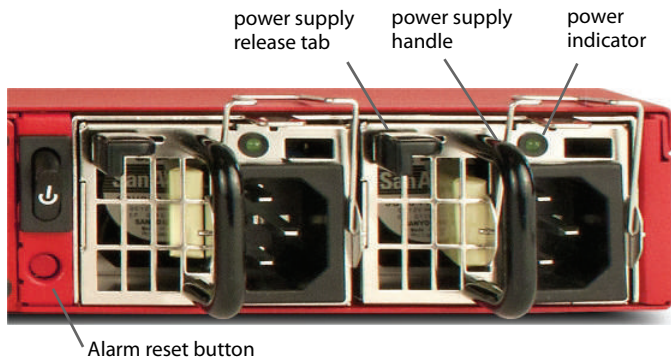

To replace a power supply:

1. Use the power indicator to identify the failed power supply. If the device is powered on, the indicator on the failed power supply is not lit.
2. Disconnect the power cable from the power supply you want to replace.
3. Find the release tab, located on the left side of the power supply.
4. Firmly push the release tab to the right, while you use the power supply handle to pull the power supply out of the slot.
5. Slide the replacement power supply into the open slot.
6. Press firmly on the face of the power supply until it is flush with the back of the Firebox.
7. If the replacement is successful, the power indicator light for the new power supply is green.

You can purchase a replacement power supply from an authorized WatchGuard reseller.

- WatchGuard Firebox M5600 Hot Swap Power Supply — WatchGuard SKU WG8598

# Legal and Regulatory Information

---

## Limited Hardware Warranty

---

This Limited Hardware Warranty (the “Warranty”) applies to the enclosed hardware product, not including any associated software, which is licensed pursuant to a separate end-user license agreement and warranty (the “Product”). BY USING THE PRODUCT, YOU (either an individual or a single entity) AGREE TO THE TERMS HEREOF. If you do not agree to these terms, please return this package, along with proof of purchase, to the authorized dealer from which you purchased it for a full refund. WatchGuard Technologies, Inc. (“WatchGuard”) and you agree as set forth below or on the reverse side of this card, as applicable:

1. LIMITED WARRANTY. WatchGuard warrants that upon delivery and for one (1) year thereafter (the “Warranty Period”): (a) the Product will be free from material defects in materials and workmanship, and (b) the Product, when properly installed and used for its intended purpose and in its intended operating environment, will perform substantially in accordance with WatchGuard applicable specifications.

This warranty does not apply to any Product that has been: (i) altered, repaired or modified by any party other than WatchGuard except for the replacement or inclusion of specified components authorized in, and performed in strict accordance with, documentation provided by WatchGuard; or (ii) damaged or destroyed by force majeure events, accidents, power spikes or similar events, or by any intentional, reckless or negligent acts or omissions of any party. You may have additional warranties with respect to the Product from the manufacturers of Product components. However, you agree not to look to WatchGuard for, and hereby release WatchGuard from any liability for, performance of, enforcement of, or damages or other relief on account of, any such warranties or any breach thereof.

2. REMEDIES. If any Product does not comply with the WatchGuard warranties set forth in Section 1 above, WatchGuard will, following the receipt of the product you claim is defective and at its option, either (a) repair the Product, or (b) replace the Product with a like or similar product; provided, that you will be responsible for returning the Product and for all costs of shipping and handling. Repair or replacement of the Product shall not extend the Warranty Period. Any Product, component, part or other item replaced by WatchGuard becomes the property of WatchGuard. WatchGuard shall not be responsible for return of or damage to any software, firmware, information or data contained in, stored on, or integrated with any returned Products.

3. DISCLAIMER AND RELEASE. THE WARRANTIES, OBLIGATIONS AND LIABILITIES OF WATCHGUARD, AND YOUR REMEDIES, SET FORTH IN PARAGRAPHS 1 AND 2 ABOVE ARE EXCLUSIVE AND IN SUBSTITUTION FOR, AND YOU HEREBY WAIVE, DISCLAIM AND RELEASE ANY AND ALL OTHER WARRANTIES, OBLIGATIONS AND LIABILITIES OF WATCHGUARD AND ALL OTHER RIGHTS, CLAIMS AND REMEDIES YOU MAY HAVE AGAINST WATCHGUARD, EXPRESS OR IMPLIED, ARISING BY LAW OR OTHERWISE, WITH RESPECT TO ANY NONCONFORMANCE OR DEFECT IN THE PRODUCT (INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, ANY IMPLIED WARRANTY ARISING FROM COURSE OF PERFORMANCE, COURSE OF DEALING, OR USAGE OF TRADE, ANY WARRANTY OF NONINFRINGEMENT, ANY WARRANTY OF UNINTERRUPTED OR ERROR-FREE OPERATION, ANY OBLIGATION, LIABILITY, RIGHT, CLAIM OR REMEDY IN TORT, WHETHER OR NOT ARISING FROM THE NEGLIGENCE (WHETHER ACTIVE, PASSIVE OR IMPUTED) OR FAULT OF WATCHGUARD OR FROM PRODUCT LIABILITY, STRICT LIABILITY OR OTHER THEORY, AND ANY

OBLIGATION, LIABILITY, RIGHT, CLAIM OR REMEDY FOR LOSS OR DAMAGE TO, OR CAUSED BY OR CONTRIBUTED TO BY, THE PRODUCT).

4. LIMITATION AND LIABILITY. WATCHGUARD'S LIABILITY (WHETHER ARISING IN CONTRACT (INCLUDING WARRANTY), TORT (INCLUDING ACTIVE, PASSIVE OR IMPUTED NEGLIGENCE AND STRICT LIABILITY AND FAULT) OR OTHER THEORY) WITH REGARD TO ANY PRODUCT WILL IN NO EVENT EXCEED THE PURCHASE PRICE PAID BY YOU FOR SUCH PRODUCT. THIS SHALL BE TRUE EVEN IN THE EVENT OF THE FAILURE OF ANY AGREED REMEDY. IN NO EVENT WILL WATCHGUARD BE LIABLE TO YOU OR ANY THIRD PARTY (WHETHER ARISING IN CONTRACT (INCLUDING WARRANTY), TORT (INCLUDING ACTIVE, PASSIVE OR IMPUTED NEGLIGENCE AND STRICT LIABILITY AND FAULT) OR OTHER THEORY) FOR COST OF COVER OR FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES (INCLUDING WITHOUT LIMITATION LOSS OF PROFITS, BUSINESS, OR DATA) ARISING OUT OF OR IN CONNECTION WITH THIS WARRANTY OR THE USE OF OR INABILITY TO USE THE PRODUCT, EVEN IF WATCHGUARD HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. THIS SHALL BE TRUE EVEN IN THE EVENT OF THE FAILURE OF ANY AGREED REMEDY.

5. MISCELLANEOUS PROVISIONS. This Warranty will be governed by the laws of the state of Washington, U.S.A., without reference to its choice of law rules. The provisions of the 1980 United Nations Convention on Contracts for the International Sales of Goods, as amended, shall not apply. You agree not to directly or indirectly transfer the Product or use of the product or associated documentation to any country to which such transfer would be prohibited by the U.S. Export laws and regulations. If any provision of this Warranty is found to be invalid or unenforceable, then the remainder shall have full force and effect and the invalid provision shall be modified or partially enforced to the maximum extent permitted by law to effectuate the purpose of this Warranty. This is the entire agreement between WatchGuard and you relating to the Product, and supersedes any prior purchase order, communications, advertising or representations concerning the Product AND BY USING THE PRODUCT YOU AGREE TO THESE TERMS. IF THE PRODUCT IS BEING USED BY AN ENTITY, THE INDIVIDUAL INDICATING AGREEMENT TO THESE TERMS BY USING THE PRODUCT REPRESENTS AND WARRANTS THAT (A) SUCH INDIVIDUAL IS DULY AUTHORIZED TO ACCEPT THE WARRANTY ON BEHALF OF THE ENTITY AND TO BIND THE ENTITY TO THE TERMS OF THIS WARRANTY; (B) THE ENTITY HAS THE FULL POWER, CORPORATE OR OTHERWISE, TO ENTER INTO THE WARRANTY AND PERFORM ITS OBLIGATIONS UNDER THE WARRANTY AND; (C) THE WARRANTY AND THE PERFORMANCE OF THE ENTITY'S OBLIGATIONS UNDER THE WARRANTY DO NOT VIOLATE ANY THIRD-PARTY AGREEMENT TO WHICH THE ENTITY IS A PARTY. No change or modification of the Warranty will be valid unless it is in writing and is signed by WatchGuard.

# Declaration of Conformity

## DECLARATION OF CONFORMITY

**WatchGuard Technologies, Inc.**  
**505 Fifth Ave. S., Suite 500**  
**Seattle, WA 98104-3892 USA**

**WatchGuard Technologies Inc. hereby declares that the product(s) listed below conform to the European Union directives and standards identified in this declaration.**

**Product(s):**

WatchGuard Models: Firebox M5600  
 Hardware Model: CL5AE32

**EU Directive(s):**

Low Voltage (2006/95/EC)  
 Electromagnetic Compatibility (2004/108/EC)  
 RoHS(2011/65/EC)  
 WEEE Directive 2002/96/EC  
 REACH EC 1907/2006

**Standard(s):**

**Safety:** EN60950-1:2006+A11:2009+A1+A12:2011+A2:2013  
**Emission:** EN 55022:2010/AC: 2011 ClassA  
 FCC Part 15 Subpart B: 2014 ClassA  
 ICES-003: Issue 5 2012 ClassA  
 CISPR 22: 2008 ClassA  
 VCCI V-3/2015.04 ClassA ITE  
 AS/NZS CISPR 22.2009+A1:2010 ClassA  
 EN 61000-3-2:2014  
 EN 61000-3-3:2013  
**Immunity:** EN 55024: 2010  
 EN 61000-4-2:2008  
 EN 61000-4-3:2006+A1:2007+A2:2010  
 EN 61000-4-4:2012  
 EN 61000-4-5:2014  
 EN 61000-4-6:2013  
 EN 61000-4-8:2009  
 EN 61000-4-11:2004

Signature:

*Laurence Huang*



Full Name: Laurence Huang  
 Position: Manufacturing Program Manager  
 Date: 1 December 2015

## CE Notice

---

The CE symbol on your WatchGuard Technologies equipment indicates that it is in compliance with the Electromagnetic Compatibility (EMC) directive and the Low Voltage Directive (LVD) of the European Union (EU).



## FCC Certification

---



### Federal Communication Commission Interference Statement

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.)

This equipment complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

1. This device may not cause harmful interference, and
2. This device must accept any interference received, including interference that may cause undesired operation.

## Industry Canada

---

This device complies with RSS-210 of the Industry Canada Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAN ICES- 3(A)/NMB- 3(A) Ce dispositif est conforme à la norme CNR-210 d'Industrie Canada applicable aux appareils radio exempts de licence. Son fonctionnement est sujet aux deux conditions suivantes: (1) le dispositif ne doit pas produire de brouillage préjudiciable, et (2) ce dispositif doit accepter tout brouillage reçu, y compris un brouillage susceptible de provoquer un fonctionnement indésirable.

## Japan VCCI Notice (Class A ITE)

### **VCCI Notice**

この装置は、クラス A 情報技術装置です。この装置を家庭環境で使用すると電波妨害を引き起こすことがあります。この場合には使用者が適切な対策を講ずるよう要求されることがあります。

### **VCCI Notice**

This is a Class A product based on the standard of the Voluntary Control Council for interference by information Technology Equipment (VCCI). If this equipment is used in a domestic environment, radio disturbance may arise. When such trouble occurs, the user may be required to take corrective actions

## Taiwan Class A Notice

### **Taiwan Class A Type Device**

警告使用者：這是甲類的資訊產品，在居住的環境中使用時，可能會造成射頻干擾，在這種情況下，使用者會被要求採取某些適當的對策。  
 警示：本電池如果更換不正確會有爆炸的危險，請勿自行更換電池

### **Taiwan Class A Type Device**

Warn users: This Class A product may cause radio interference when used in a residential environment. If this occurs, the user must take appropriate countermeasures.

## Mexico Notice

La operación de este equipo está sujeta a las siguientes dos condiciones:

1. es posible que este equipo o dispositivo no cause interferencia perjudicial
2. este equipo o dispositivo debe aceptar cualquier interferencia, incluyendo la que pueda causar su propia operación no deseada.

## Korea Notice

### 사용자안내문

기종별 A급 기기 (업무용 방송통신기자재)	사용자안내문 이 기기는 업무용 (A급) 전자파 적합 기기로서 판매자 또는 사용자는 이 점을 주의하시기 바라며, 가정외의 지역에서 사용하는 것을 목적으로 합니다. 목적으로 합니다
-------------------------------	--

## RoHS Statement

---

The member states of the European Union approved directive 2002/95/EC, Restrictions of Hazardous Substances ("RoHS directive") that became valid on July 1, 2006. It states that all new electrical and electronic equipment put on the market within the member states must not contain certain hazardous materials. This WatchGuard device complies with the European Union's R0HS directive 2002/95/EC and similar regulations that may be adopted by other countries for European Sales.

## WEEE Statement

---

WEEE is a general set of requirements dictated in the EU Directive 2002/96/EC. This Directive mandated that member EU countries enact regulations governing the Waste of Electrical and Electronic Equipment (WEEE). The Directive, and its individual transpositions into specific country laws and legislation, is aimed at the reduction of WEEE through reuse, recovery, and recycling of WEEE.

WatchGuard is working in partnership with our European Union (EU) distribution partners to ensure that our products are in compliance with the WEEE statutes, and that the recovery of our product per the specific EU country legislative requirements is seamless for our product's end users. If you have a WatchGuard product that is at its end of life and needs to be disposed of, please contact WatchGuard Customer Care Department at:

U.S. Customers: 877.232.3531

International Customers: +1.206.613.0456

WatchGuard is reasonably confident that our products do not contain any substances or hazardous materials presently banned by any legislation, and do not present a risk due to hazardous materials. WEEE recovery professionals should also note that these products do not have any materials that are of particular high value in their individual form.

## REACH Certificate of Compliance

---

The EU chemicals policy REACH (**R**egistration, **E**valuation, **A**uthorization and restriction of **C**hemicals) came into effect on June 1st 2007. REACH is Europe's new chemicals legislation, which is applicable in all 27 EU Member States as well as the EFTA European Economic Area (EEA). REACH creates a new system for gathering information, assessing risks to human health and the environment, and authorizing or restricting the marketing and use of chemicals produced or supplied in the EEA. REACH has an impact on EEA producers and importers of finished products and users of chemicals in the course of industrial or professional activities.

WatchGuard supports the overall REACH objective of improving the protection of human health and the environment and will meet all applicable REACH requirements. WatchGuard is strongly committed to working with our customers and supply chain to define and implement the REACH requirements and ensure a smooth transition to compliance.



One of the REACH requirements is that manufacturers and importers have the duty to register substances they are producing or importing. In accordance with the regulations, the products of WatchGuard do not need to be registered for the following reasons:

1. WatchGuard does not import more than 1 metric ton per year of a substance as defined by REACH.
2. WatchGuard products are non-chemical products that are not designed to release any substance under normal and reasonably predictable application.
3. Our products do not contain the listed substances at more than 0.1% by weight of the whole product/part.

## Licensing

---

Some components of the WatchGuard System Manager software and Fireware XTM OS are distributed with source code covered under one or more third party or open source licenses.

You can find full licensing information in the product documentation on our public web site at [www.watchguard.com/help/documentation](http://www.watchguard.com/help/documentation).

To get the source code covered by this license, contact WatchGuard Technical Support at:

United States or Canada: 877.232.3531

All other countries: +1.360.482.1083

You can download the source code at no charge. If you request the material be sent to you on CD-ROM, there is a \$35 charge for administration and shipping.

